





**MONTERINGSANVISNING · INSTALLATION INSTRUCTIONS
MONTAGEANLEITUNG · INSTRUCTIONS DE MONTAGE**

Saab 9-3 M03-

Gear lever cover

Accessories Part No.	Group	Date	Instruction Part No.	Replaces
12 792 732 12 792 733 12 799 228 12 799 229	9:85-19	May 02	12 799 230	

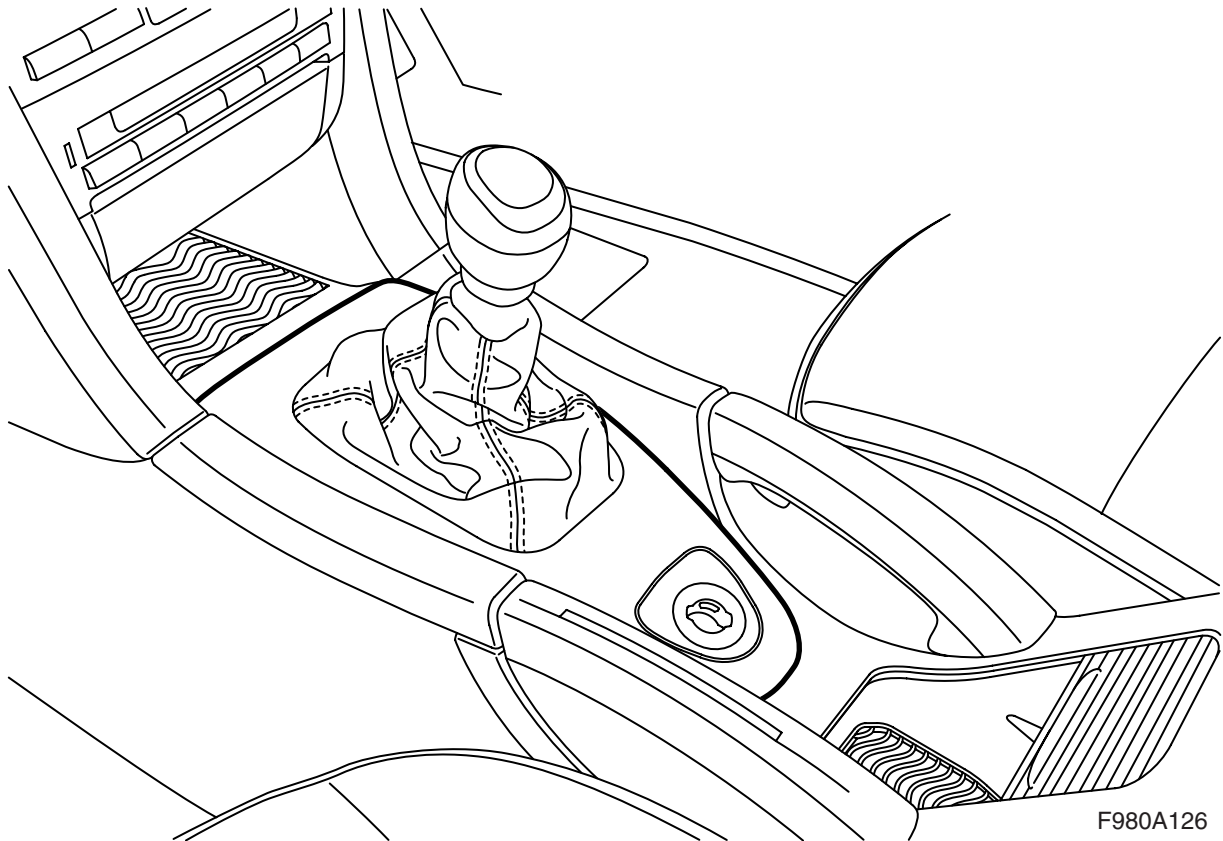

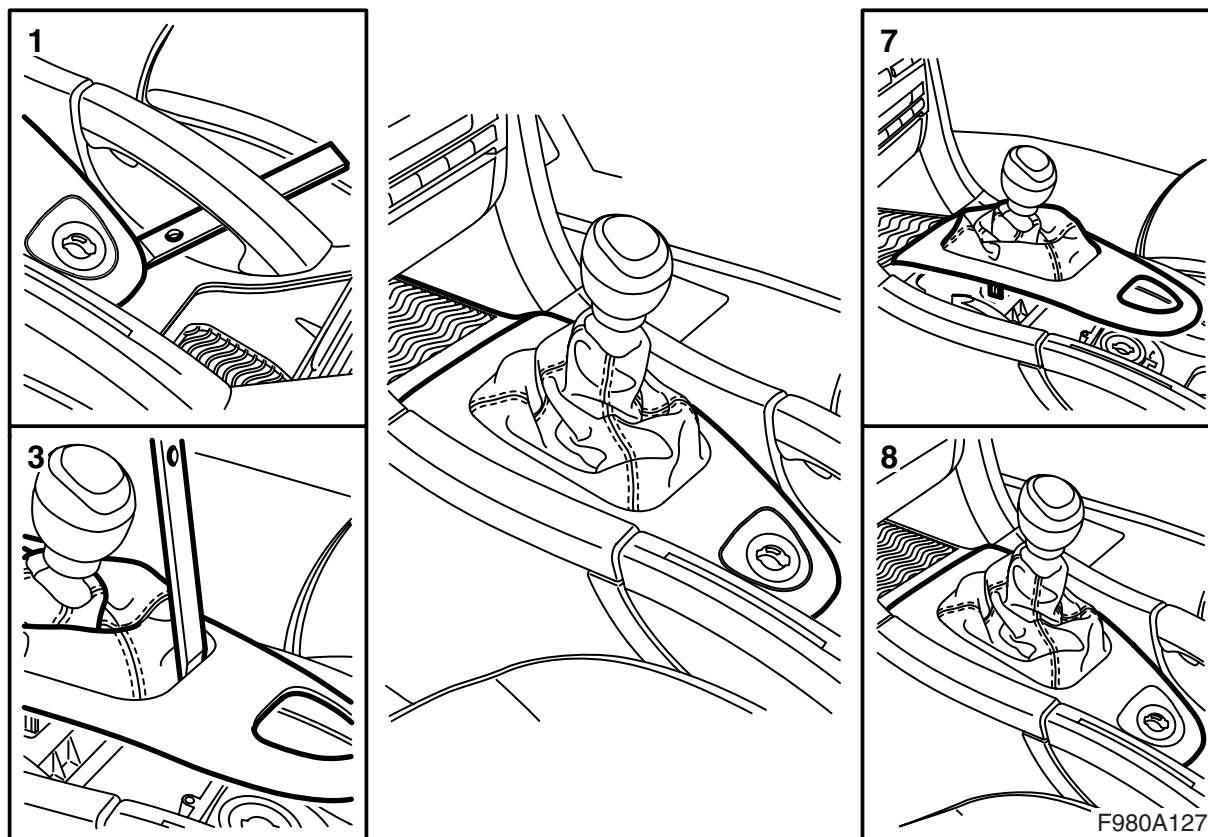

The ignition key must be removed from the ignition switch.

- 1 Carefully insert a screwdriver or the like (tool 82 93 474 recommended) between the cover and floor console in the area to the side and behind the ignition switch.

Note

Use the space under the handbrake lever in order to gain access with the tool.

- 2 Lift and remove the cover.
- 3 **Cars with manual gearbox:** Insert a small screwdriver or the like (tool 82 93 474 recommended) between the gear lever gaiter support frame and cover while removing the rear edge of the support frame. Lift up the rear edge of the gaiter and pull it rearwards.
- 4 Remove the cover.
- 5 Remove the rubber mat from the cover.
- 6 Fit the rubber mat to the new cover.
- 7 **Cars with manual gearbox:** Lower the new cover over the gear lever. Fit the gear lever gaiter support frame by inserting the pins in the front edge of the support frame into the holes in the cover. Press the rear edge of the support frame firmly into the cover.
- 8 Align the catches in the front edge of the cover and fasten the rear cover edge by pressing firmly.